

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
14 February 2002 (14.02.2002)

PCT

(10) International Publication Number  
**WO 02/13463 A2**

- (51) International Patent Classification<sup>7</sup>: **H04L 12/28**, 29/06 (74) Agent: **GROENENDAAL, Antonius, W., M.**; Internationaal Octrooibureau B.V., Prof Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/EP01/08757 (81) Designated States (*national*): CN, JP, KR.
- (22) International Filing Date: 30 July 2001 (30.07.2001) (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 09/635,549 10 August 2000 (10.08.2000) US
- (71) Applicant: **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor: **SHTEYN, Eugene**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- Published:**  
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**WO 02/13463 A2**

(54) Title: TOPICAL SERVICE PROVIDES CONTEXT INFORMATION FOR A HOME NETWORK

(57) Abstract: A consumer apparatus is made an intuitive component of a user-interface to a topical server. A specific user-interaction with the apparatus or its proxy on the home network causes a request to be sent to a specific server on the Internet based on a predefined URL. The home network receives a particular web page from the server with content information dedicated to the context of use of the apparatus.

Topical service provides context information for a home network

## FIELD OF THE INVENTION

The present invention pertains to the field of user interaction with networked consumer devices. More particularly, this invention relates to user access to web-based services associated with a particular consumer device or with a group of such devices.

5

## BACKGROUND

The expression "home network" generally refers to a collection of interconnected apparatus in and around the home. An apparatus on the network can communicate with one or more of the other apparatus so as to provide distributed functionalities and synergy through interoperability, typically under control of software applications and macro's. The network provides functionalities such as entertainment and education (e.g., audio and video play-out, electronic content guides, including EPGs), control (e.g., thermostat, lights, sprinkler, kitchen appliances) and monitoring (e.g., security system, baby monitor).

15 A variety of software architectures are being developed for implementing a home network. Examples thereof are HAVi, Home API, UPnP, Jini, HomeRF, HomePNA, etc.

A more specific example of a home network is discussed in U.S. serial no. 09/222,403 (attorney docket PHA 23,605) filed 12/29/98 for Doreen Cheng for HOME CONTROL SYSTEM WITH DISTRIBUTED, NETWORKED DEVICES. Devices within a locale, such as a home, are controlled by detecting the presence of an identified user within different areas of the locale. The devices within the areas are controlled in response to each identified user's preferences. The locating and control devices may be stand-alone devices, or integrated within other electronic devices, such as televisions, stereos, computers, and so on.

25 Also provided in this invention are user task modules that suggest control actions based on the location of the user, the current context, and a profile of the user based upon the user's prior actions. The determination of each user's location is facilitated by the use of a tracker module that the user carries about. The user may determine the degree of automation to be applied at any time.

Another example is discussed in U.S. serial no. 09/5/11/00 (attorney docket US 000106) file 5/11/00 for Eugene Shteyn and Ruud Roth for ELECTRONIC CONTENT GUIDE RENDERS CONTENT RESOURCES TRANSPARENT. This document relates to a data management system that combines the data of an EPG with other data for other types of content information, typically within the context of a home entertainment system. The system comprises a data base for representing schedule information associated with scheduled content information from a content provider such as a broadcasting station or a video-on-demand (VOD) service. In addition, the data base also represents inventory information that is associated with content information available from another resource, e.g., as recorded at the consumer's digital Personal TV Receiver during previous broadcasts, or from a CD or DVD jukebox. Accordingly, this document introduces a general type of an electronic guide, herein after referred to as an electronic content guide (ECG).

Yet another example is discussed in U.S. serial no. 09/160,490 (attorney docket PHA 23,500) filed 9/25/98 for Adrian Turner et al., for CUSTOMIZED UPGRADING OF INTERNET-ENABLED DEVICES BASED ON USER-PROFILE. This document discusses a server system that maintains a user profile of a particular end-user of consumer electronics network-enabled equipment and a data base of new technical features for this type of equipment. If there is a match between the user-profile and a new technical feature, and the user indicates to receive information about updates or sales offers, the user gets notified via the network of the option to obtain the feature.

Still another example is given by U.S. serial no. 09/189,535 (attorney docket PHA 23,527) filed 11/10/98 for Eugene Shteyn for UPGRADING OF SYNERGETIC ASPECTS OF HOME NETWORKS. This document relates to a server that has access to an inventory of devices and capabilities on a user's home network. The inventory is, for example, a look-up service as provided by HAVi or Jini architecture. The server has also access to a data base with information of features for a network. The server determines if the synergy of the apparatus present on the user's network can be enhanced based on the listing of the inventory and on the user's profile. If there are features that are relevant to the synergy, based on these criteria, the user gets notified.

## SUMMARY OF THE INVENTION

The above indicate that the apparatus interconnected in a home network open up possibilities for new synergistic functionalities to the benefit of the user. The software architectures for the home networks typically make the user-interaction task-centric, rather

than device-centric. If the network has a gateway for connecting to the Internet or to another data network, even more functionalities can be implemented by using resources on the Internet such as application servers and information stores. An example hereof is discussed in U.S. serial no. 09/519,546 (attorney docket US 000014) filed 3/6/00 for Erik Ekkel et al., for

5 PERSONALIZING CE EQUIPMENT CONFIGURATION AT SERVER VIA  
WEB-ENABLED DEVICE. This document relates to facilitating the configuring of CE equipment by the consumer through delegating this configuring to an application server on the Internet. The consumer enters his/her preferences in a specific interactive Web page through a suitable user-interface of an Internet-enabled device, such as a PC or set-top box or  
10 digital cellphone. The application server generates the control data based on the preferences entered and downloads the control data to the CE equipment itself or to the Internet-enabled device.

The inventor proposes a new type of service that enables the user of a home network to take advantage of the network connection to the Internet. More specifically, the  
15 invention relates to a method of providing a service to a user of a consumer apparatus. The method comprises maintaining a web page on a server for providing to the user content information about a context of use of the apparatus, and enabling the user to initiate retrieval of the web page from the server via a data network through sending to the server a request based on the URL that is associated with the apparatus. The URL is retrieved from, e.g., the  
20 apparatus or from a proxy representative of the apparatus, and sent by the apparatus, proxy or an intermediate device on the home network. The web page is received by the apparatus associated with the URL or by another device on the home network that is capable of displaying or playing out the web page. Thus, the following scenarios are possible, given here by way of example.

25 The user causes a garbage can or its proxy to initiate retrieval of a web page through a URL associated with the garbage can. The web page indicates the schedule of the local garbage collection service. The garbage truck may have a GPS unit to allow tracking its progress along the route to give the user an indication of the time the truck shows up at the user's street address.

30 The user causes a DVD player or its proxy to initiate retrieval of a web page indicated by the URL associated with the type "DVD player". The web page provides information about new DVD's in the user's preferred categories or about the most popular DVDs on sale. The URL is pre-programmed or user-programmed in order to connect to a

specific service on the Web. User-profiling may be part of this service so as to more accurately provide the user with information.

The user causes a blender (kitchen appliance) or its proxy to initiate retrieval of a web page indicated by the URL representative of the type "blender". The web page  
5 provides information on recipes for making drinks or creamy soups. The recipes get updated frequently. The Web page may have other blender-relevant information and links to other pages useful within the blender context.

The user may cause his/her motorcycle or its proxy to submit a request to a server on the Internet based on the URL to get a web page on topics relevant within the  
10 context of using, owning, riding, or maintaining a motorcycle. The Web page may include targeted advertisements, e.g., of local dealers.

As another example, the user has a proxy for a book case on the network that can be caused to submit a request based on a URL associated with "books". The URL points to, e.g., the home page of an online book retail shop or the town's library to enable the user to  
15 browse the inventory and purchase or order a specific book.

The connection of the apparatus or its proxy to the home network enables to retrieve, display or play out the web page on, e.g., a PC monitor or the TV monitor, a touch screen remote such as the PRONTO (TM) of Philips Electronics, or a dedicated Web pad, or via a speaker system if the web page contains audio information. Note that the apparatus in  
20 above examples, i.e., the garbage can, the DVD player, the blender, and the motorcycle itself now has become, in the perception of the user, a topical server. The topical server supplies content information about the apparatus, about its context of its usage. Another way of looking at the invention is that the apparatus has become an icon as if it were part of a graphical user-interface (GUI). Causing the apparatus or its proxy to submit a request based  
25 on the URL is similar to clicking an icon on a GUI, the icon being some sort of a graphical representation or metaphor of the documents or application or service associated with it. In the invention, the apparatus is the icon. Accordingly, the user interaction with the networked environment has become highly intuitive.

The external service and the apparatus are intuitively associated with each  
30 other. The access is easily obtained, low cost, and user friendly. The invention uses a direct access means to invoke display of a web page for an external service associated with the apparatus. The service is associated with consumable content specific to the context of usage of the apparatus. The type of apparatus defines the context. The user invokes retrieval of a web page representing a service. The service advertises consumable content specific to the

usage context. This supports an attractive business model for device manufacturers and the service providers. It enables the manufactures to partner with external services in order to provide the user at his or her convenience with easy access to context-relevant content that enhances usage of the apparatus. The revenue received by the service provider as a result of the user interaction with the designated web page can be shared between the service provider and the device manufacturer.

In one aspect of the invention, the manufacturer provides a preprogrammed remote control for a network-enabled consumer apparatus. In a one-step interaction with the remote control, a user retrieves an external web page with content that is specific to the apparatus. The web page is presented through a device pre-determined by the user. The user may order and/or retrieve at least one service item from the web page, e.g., through a buy button.

In another aspect of the invention, an intermediary device captures a request for access to a service associated with the apparatus, e.g., by intercepting an IR or RF signal from a remote control. The intermediary device retrieves the address of the web page, related to the service, from the target apparatus. The address can also be obtained from an internal or external service lookup facility. The intermediary device then proceeds with retrieving and presenting or relaying the web page in the manner described above.

In yet another aspect of the invention the user can designate a preferred service provider associated with the target apparatus, i.e., the URL is user selectable. The user may also choose a service provider from a set of choices supplied by the apparatus itself or by the intermediary device. Note that this supports a subsidized business model for the manufacturer or distributor, wherein a preprogrammed URL can be leased or otherwise acquired from the manufacturer by the service provider.

In one more aspect of the invention, in a user environment with a plurality of controllable devices, the target service provider is determined by the mode of the system's user interface means, e.g., a remote control, device front panel, etc.

In yet another aspect of the invention the target service is associated with a consumer electronics device and the service web page address is determined by the content played out by the device.

In another aspect of the invention the URL is associated with the apparatus at a retail location, such as electronics store, a motorcycle dealership, etc. Note that this supports a business model for the manufacturer, distributor and retailer to improve channel distribution options, increase and customize service-offering space. Within this context, see,

for example, U.S. serial no. 09/349,676 (attorney docket PHA 23,681) filed 7/8/99 for Kristin Ondeck for AFTER-SALES CUSTOMIZATION SPECIFIED BY RETAILER ACTS AS INCENTIVE. This document relates to a machine-implemented method of doing business to stimulate commercial activities. A customer notifies a manufacturer or a dedicated service  
5 provider, of the purchase of merchandise from a specific retailer. Upon being notified, the manufacturer or service provider customizes a portal or home page for the customer by temporarily adding an advertisement banner associated with the retailer.

Above examples illustrate the invention with external servers on the Internet. The invention can also be used for retrieval of topical information, related to the context of  
10 usage of the apparatus, from an internal resource or server residing on the home network. A specific user-input to an apparatus or the user triggering its proxy initiates retrieval of this information under control of a predetermined URL from the home network server. For example, triggering a car's proxy on the home network causes, e.g., an HTML page to be rendered at a predetermined display to inform the user of the date of the next scheduled oil  
15 change as entered into the home system by the service station via email upon the previous service. As another example, the triggering of the apparatus or its proxy causes the electronic content guide, illustrated in U.S. serial no. 09/5/11/00 (attorney docket US 000106) mentioned above, to be retrieved.

In order to clarify the invention with respect to documents and equipment  
20 available in the public domain, consider U.S. patent 5,956,487. This document relates to embedding into a device a Web access functionality to enable low cost, widely accessible and enhanced user interface functions for control of the device. A web server in the device provides access to the user interface functions for the device through a device web page. A network interface in the device enables access to the web page by a web browser such that a  
25 user of the web browser accesses the user interface functions for the device through the web page. Note that this document neither teaches nor suggests going beyond a web page with control functions for a device in order to provide information about a context of usage. The invention, on the other hand, lets the device become a topical server, through the device itself or its proxy on the network.

30 Also consider the Tivo HDD-based digital video recorder. The Tivo service provides features and updates by enabling the recorder to automatically make a daily phone call to the server to get the up-to-date control information in the form of an EPG. In the invention, the user triggers the retrieval of a web page with information about a context of usage through a URL.

## BRIEF DESCRIPTION OF THE DRAWINGS

The invention is explained in further detail, by way of example, and with reference to the accompanying drawing, wherein:

- 5 Figs. 1-2 are block diagrams of home networks configured to enable a user to access external services for information supply about the context of usage per apparatus.

Throughout the figures, same reference numerals indicate similar or corresponding features.

## 10 DETAILED DESCRIPTION

- Fig. 1 is a block diagram of a network environment 100 that enables a user to access external services that supply content information about a context of use of appliances and apparatus. Network 100 comprises a DVD player and a TV set 104. DVD player 102 is connected to TV 104 via a data network 106. Network 106 can operate under a variety of
- 15 networking software architectures such as UPnP, HAVi, and Jini. Home appliances can be connected using different physical media, such as analog connections, IEEE 1394, a phone line, the power lines, ethernet, and a wireless connection. The appliances can communicate directly or via dedicated communication bridges using different communication protocols, such as TCP/IP, IEC 611883, HomePNA, etc. DVD player 102 can be controlled by a remote
- 20 control 108 via an IR or RF signal 110. Network 100 also comprises a data network 112 that connects to a coffee maker 114 and a kitchen pad 116. Kitchen pad 116 here is a thin client device capable of displaying video and graphics on a display monitor, preferably an LCD accommodated in a rugged, sealed housing to withstand environmental influences such as moisture and playful children. Similar to network 102, network 112 can operate using
- 25 different software architectures, communication protocols and physical media. Both networks are connected to an Internet gateway device 118, e.g., a PC or a set top box or a home server, that enables communication between network environment 100 and an external server 120 via the Internet 122 or a similar public or private wide area data network. Remote control 108 and the front panel of coffee maker 114 comprise direct service access buttons
- 30 124 and 126, respectively.

When the user presses service access button 124 on remote control 108 for DVD player 102, the DVD Player 102 retrieves the address of the associated service page from local storage and requests the page from the external server 120 through Internet



gateway device 118. When the data is received, the data gets displayed on the display monitor of TV104.

The operation listed above, specifically the look up and retrieval of web page addresses, data retrieval, conversion of the data, e.g., a HTML page, into a presentation signal, e.g. video, and finally presentation itself, can be implemented by a variety of embodiments.

Consider as an example a HAVi-based embodiment of the present invention. Network 106 comprises IEEE 1394 devices, including digital TV 104, DVD player 102 and Internet gateway 118. TV 104 implements a HAVi FAV. DVD player 102 and gateway 118 each implement a HAVi BAV. During the run-time, the software device control module (DCM) of DVD player 102 as well as the DCM of gateway 118 are uploaded to the FAV. When the user presses service access button 124 on remote control 108, DVD player 102 communicates the signal to its DCM using an IEEE 1394 interface. The DCM of DVD player 102 uses the HAVi Registry to locate a HAVi WebProxy FCM, which represents the functionality of gateway 118 at the software level. The DCM of DVD player 102 retrieves the address of the associated service page and requests it via the WebProxy FCM from external server 120. When the file is received, the DCM converts the data into video signal, that is presented on the display monitor of TV 104.

Consider as another example a UPnP embodiment of the present invention. DVD player 102 is connected to TV 104 via an S-video cable for analog video. Network 106 is implemented using HomePNA-compatible hardware and software (see, e.g., [www.homepna.org](http://www.homepna.org)). DVD player 102 and Internet gateway 118 can communicate via the TCP/IP protocol. Both of them host UPnP-compatible software and implement their respective device interfaces and message sets (see [http://www.upnp.org/UPnPDevice\\_Architecture\\_1.0.htm](http://www.upnp.org/UPnPDevice_Architecture_1.0.htm) for further detail).

When the user presses service access button 124 on remote control 108, and if network 106 has not been configured at a previous occasion, DVD player 102 locates Internet gateway 118 using the HTTP multicast mechanism according to the UPnP standard. DVD player 102 obtains the UPnP description document of Internet gateway 118 and obtains the address of its UPnP services required for mapping Internet addresses. Then DVD player 102 uses the Internet Gateway services to obtain the IP address of external server 120. After that, DVD player 102 requests and retrieves the web page data from external server 120 using the HTTP protocol. Upon receipt of the data, DVD 102 converts the data, e.g., an HTML document, into a video signal and sends it via the S-video cable to TV 104.

Consider as yet another example of a UPnP implementation of the invention. Coffee maker 114 is connected to the display of kitchen pad 116 via a proprietary communication protocol. Kitchen pad 116 is connected to Internet gateway 118 using power line based HomePlug hardware and software (see, e.g., [www.homeplug.org](http://www.homeplug.org)). Kitchen pad 5 116 and Internet gateway 118 can communicate via the TCP/IP protocol. Both of them host UPnP-compatible software and implement their respective device interfaces and message sets.

When the user presses service access button 126 on the front panel of coffee maker 114, coffee maker 114 retrieves the address of the service web page, e.g., from internal 10 storage, and sends it to kitchen pad 116. The latter locates Internet gateway device 118 and accesses its services to obtain the IP address of external server 120. Then, kitchen pad 116 requests and retrieves the service web page data from external server 120 using the HTTP protocol. The display of kitchen pad 116 presents the page using embedded Internet browser software. Kitchen pad 116 may cache the service web page locally or on network 112 if the 15 page has not been updated on server 120. Kitchen pad 116 may update the page periodically during idle time in order to have it ready immediately upon the user's request.

A home network may have multiple clusters of apparatus with different software architecture. For bridging multiple software architectures in a CE environment, see the following documents:

- 20 - U.S. serial no. 09/340,272 (attorney docket PHA 23,634) filed 6/25/99 for Eugene Shteyn for BRIDGING MULTIPLE HOME NETWORK SOFTWARE ARCHITECTURES . This document relates to integrating home networks of different software architectures. References to software representations of devices and services on a first one of the networks are automatically created. The references are semantically sufficient to enable automatic 25 creation of at least partly functionally equivalent software representations for a second one of the networks so as to make the devices and services of the first network accessible from the second network.
- U.S. serial no. 09/616,632 (attorney docket US 000184) filed 7/26/00 for Jean Moonen and Eugene Shteyn for SERVER-BASED MULTI-STANDARD HOME NETWORK 30 BRIDGING. This document relates to bridging home networks. The bridge in the home network couples first and second clusters of devices. The clusters have different software architectures. The bridge is connected to a server on the Internet. This server offers a lookup service for some set of standards, and allows a bridge to locate and download the appropriate

translation modules for allowing a device in the first cluster to interact with the second cluster.

- U.S. serial no. 09/624,648 (attorney docket US 000185) filed 7/25/00 for Jean Moonen for UI-BASED HOME NETWORK BRIDGING . This document relates to a home network that  
5 comprises a UPnP cluster and a HAVi cluster. UPnP uses programmatic device interfaces that are based on standardized messages being sent between the devices. HAVi also uses programmatic interfaces but needs to know the proper device type and FCMs in advance. In addition, the current UPnP and HAVi standards do not define devices that can readily be mapped onto one another owing to semantic differences. To overcome this problem, the  
10 clusters are bridged by representing a UPnP device on the HAVi cluster, wherein the UPnP device's description document is used to generate a HAVi DDI target to enable UI-based control of UPnP devices through a HAVi UI.

Fig.2 is a block diagram of a home environment 200 that comprises a proxy device 202 for representing a classic transversal-boxer-twin motorcycle 204 on home  
15 network 112. Proxy 202 is physically located, for example, in the garage of the user where motorcycle 204 is parked when not in use. Proxy 202 is connected to network 112 wired or via a wireless fashion, and could even be installed on motorcycle 204 itself in the form of a beacon that is capable of sending a message to network 112 when triggered by the user. When the user triggers proxy 202, e.g., via an IR or RF remote control, a voice command, a  
20 button or another suitable user input, proxy 202 causes network 112 to contact an external server 206 to request a specific page indicated by a specific URL. The URL can be stored on network 112, in proxy 202, or in look up table at gateway 118. Server 206 is maintained by a special interest group or by the manufacturer or importer of this brand of motorcycles. Server 206 provides context information about these motorcycles, e.g., maintenance tips,  
25 information about tools and where to purchase them, riding gear such as protective clothing, upcoming events in the geographical neighborhood of the user (that for this type of motorcycle can easily have a range of 3000 miles), availability of spare parts, etc., etc. The proximity of proxy 202 to motorcycle 204 intuitively merges motorcycle 204 into a user-interface to this server 206. As a result, proxy 202 lets the user perceive motorcycle 204 to  
30 have become the entrance to topical server 206. Home environment 200 is configured to render the web page retrieved from this server 206 on a display monitor 208. For example, environment 200 has a look up table that associates the URL with a specific output device such as monitor 208. Monitor 208 is located, in this example, in the garage, or it is a functional part of a touch screen remote control device used to trigger proxy 202, etc.

The motorcycle example explained above illustrates how the proxy makes a legacy apparatus, i.e., an apparatus without network communication capabilities, an intuitive user interface to a topical server within the context of usage of the apparatus. Accordingly, a home network capable of providing access to topical services can be implemented by letting  
5 the user intuitively associate a legacy apparatus with an Internet service through an aftermarket proxy. The proxy is capable of initiating the fetching of the topical web page from a specific server via a gateway on the home network upon registering a user input. The proxy can be a very simple device as specified above.

An example of an implementation of a proxy is a device that is capable of  
10 communicating a URL to the home network or the gateway upon being triggered by the user. Businesses, manufacturers or Internet Service Providers can market such a device with a pre-programmed URL. The device is installed near or at the apparatus it is to represent in order to let the user make the intuitive link between the apparatus and the service.

As another example, the proxy is capable of sending a unique identifier to an  
15 intermediate device that converts the identifier into a URL, e.g., according to a look-up table, and connects to the topical server via the gateway on the home network and request the page or file based on the URL. An ISP can download these re-configured look-up tables for installation on a PC or a set top box, thus being able to generate a revenue stream from the URL owners. For example, the proxy comprises a label that can be attached to a surface of an  
20 apparatus. The label has printed, passive components, among which an antenna formed by one or more loops of electrically conductive material. The antenna picks up a primary RF signal sent by a pointing device held by the user. The frequency of the primary RF signal gets modified through a non-linear element in the antenna loop. As a result a secondary RF signal is sent out by the antenna, now with a different frequency so as interfering with the primary  
25 signal. The signal transmitted is picked up by the pointer device or another component on the home network. The secondary signal carries a unique signature of the label. For example, the frequency of the secondary signal is used to identify the label. Alternatively, the secondary signal is modulated by circuitry in the label that gets powered by the primary signal. In this  
30 manner, each label can be distinguished from other labels and can be identified by the pointing device or the component on the home network. The identity of the label is associated with the apparatus and thus can serve as the input to a look-up table, the output of which gives the URLs of files at topical servers. This conversion can take place, e.g., in the pointing device that in turn is capable of sending the proper request, based on the URL, to the gateway on the home network. Again, the apparatus has become part of the intuitive user interface by

virtue of the label's identity that can be remotely sensed. The pointing device can be accommodated in a mobile phone or in a remote control device such as the PRONTO (TM) or in another handheld device with browsing capability, etc.

As is clear, the proxy can be made an extremely simple device. It merely has  
5 to enable to forward an identifier when triggered by the user so that a request with a corresponding URL can be sent over the Internet.

The URLs can be provided from the home environment as illustrated above. For example, the URLs are stored at the apparatus for which topical servers exist, or they are stored at the proxies, or at the gateway of the home network.

10 Alternatively, the URLs are stored elsewhere, e.g., at a server of the ISP or at a special server of a third party. The ISP or third party maintains a look-up table or another conversion means that translates an identifier representative of a type of apparatus and sent from the home network into a URL of a web page or file at a topical server. The home network then sends to a particular server on the Internet an identifier of the apparatus for  
15 which topical content information is being sought. The geographic location of the user's home network or the user-profile, e.g., based on user history, is preferably taken into consideration to create a customized conversion of identifiers to URLs.

## CLAIMS:

1. A consumer apparatus responsive to a user-input for initiating retrieval of data from a server under control of a predetermined URL specific to a type of the apparatus, the data representing content information about the context of usage of the apparatus.
- 5 2. The apparatus of claim 1, comprising an Internet-access functionality.
3. The apparatus of claim 1, comprising a memory for storage of the URL.
4. The apparatus of claim 1, wherein:  
10 - the apparatus has a remote control device; and  
- the device has a dedicated button for initiating the retrieval of the data.
5. A proxy device for representing an apparatus on a home network, wherein the proxy is responsive to a user-input for initiating, via a gateway, retrieval of data from a server  
15 under control of a predetermined URL specific to a type of the apparatus represented.
6. The proxy of claim 5, wherein the data represents content information about the context of usage of the apparatus.
- 20 7. The proxy of claim 5, storing the URL.
8. The proxy of claim 7, wherein the URL is programmable.
9. The proxy of claim 5, responsive to a wireless signal.  
25
10. The proxy of claim 9, for transmitting a further signal with a unique identifier upon receiving the signal.
11. A remote control device for control of a consumer apparatus, wherein:

- the device has a key dedicated to initiating, via the apparatus, retrieval of data from a server; and
- the data represents content information specific to the context of usage of the apparatus.

5    12.            The device of claim 11, storing an identifier representative of a URL of a file at the server.

13.            A method of enabling a service provider to provide a service via the Internet to a user of a consumer apparatus, the method comprising:

- 10    - enabling the user to initiate via the apparatus sending of a request with an identifier representative of a type of the apparatus to a server on the Internet; and
- upon receipt of the request by the server initiating user access to a web page with content information about a context of using the apparatus.

15    14.            The method of claim 13, comprising creating a data base of the type per user.

15.            The method of claim 13, comprising creating a data base of URLs per user.

16.            The method of claim 13, comprising providing the apparatus with an identifier  
20    for a web page.

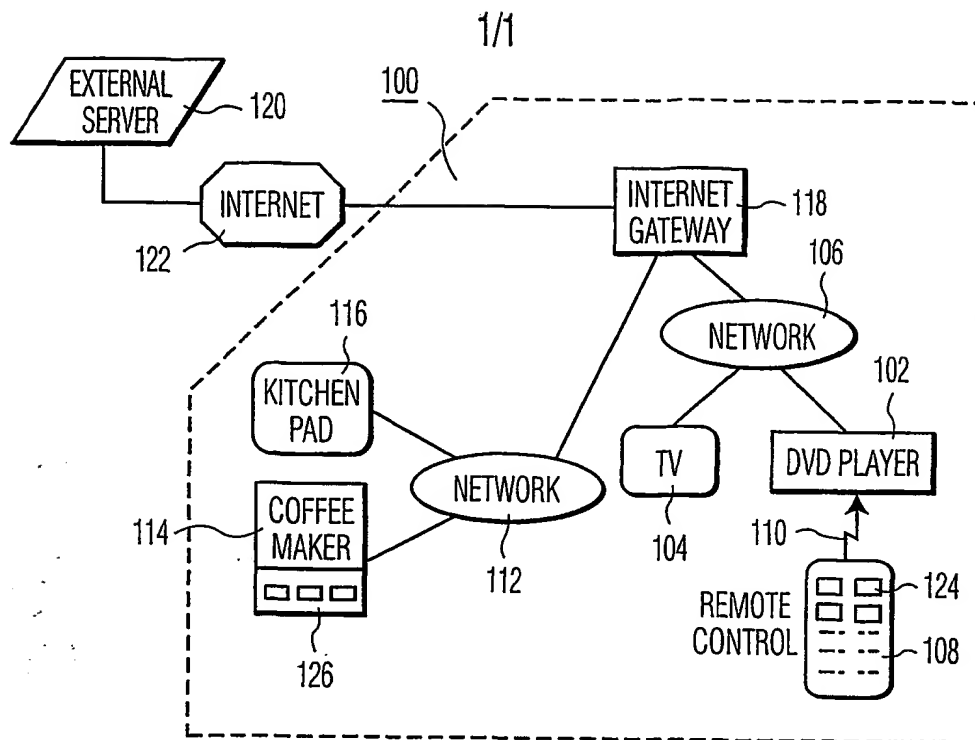


FIG. 1

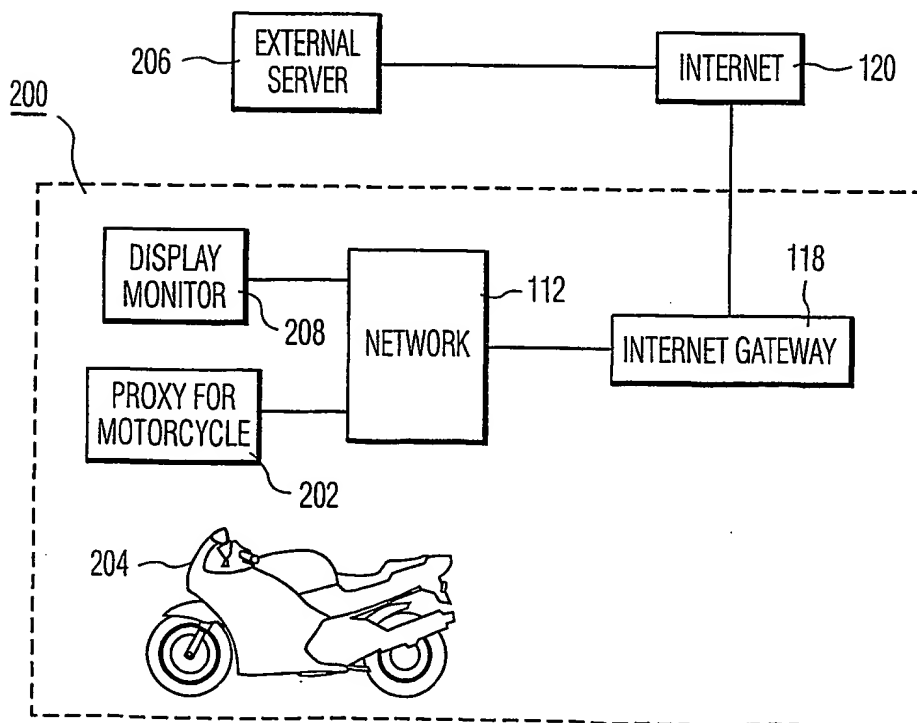


FIG. 2



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
14 February 2002 (14.02.2002)

PCT

(10) International Publication Number  
**WO 02/013463 A3**

- (51) International Patent Classification<sup>7</sup>: **H04L 12/28**, 29/06 (74) Agent: **GROENENDAAL, Antonius, W., M.**; Internationaal Octrooibureau B.V., Prof Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: **PCT/EP01/08757**
- (22) International Filing Date: **30 July 2001 (30.07.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data: **09/635,549** **10 August 2000 (10.08.2000)** **US**
- (71) Applicant: **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (81) Designated States (*national*): **CN, JP, KR.**
- (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- Published: **— with international search report**
- (88) Date of publication of the international search report: **10 October 2002**
- (72) Inventor: **SHTEYN, Eugene**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **TOPICAL SERVICE PROVIDES CONTEXT INFORMATION FOR A HOME NETWORK**

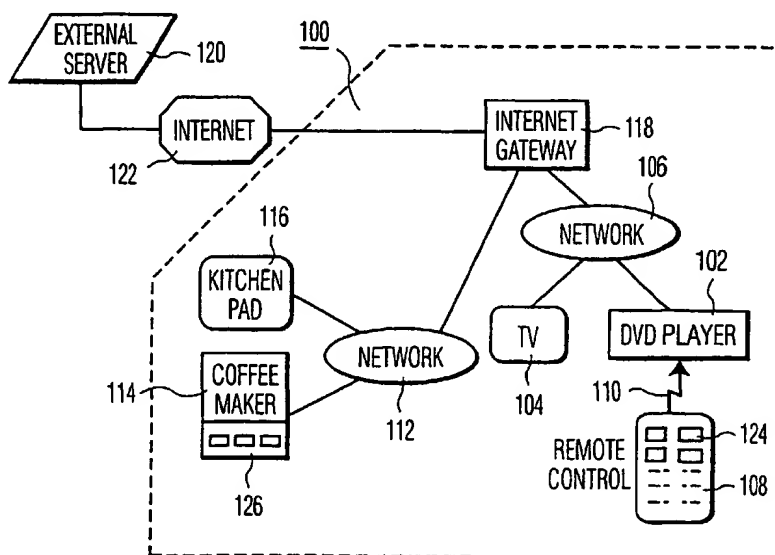

(57) Abstract: A consumer apparatus is made an intuitive component of a user-interface to a topical server. A specific user-interaction with the apparatus or its proxy on the home network causes a request to be sent to a specific server on the Internet based on a predefined URL. The home network receives a particular web page from the server with content information dedicated to the context of use of the apparatus.

WO 02/013463 A3

## INTERNATIONAL SEARCH REPORT

 International Application No  
 PCT/EP 01/08757

 A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 H04L12/28 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

 Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 955 774 A (SAMSUNG ELECTRONICS CO LTD) 10 November 1999 (1999-11-10) column 1, line 8 - column 2, line 35 column 3, line 13 - line 55 column 5, line 9 - line 38 -----	1,5,11, 13
A	EP 1 017 206 A (NORTEL NETWORKS CORP) 5 July 2000 (2000-07-05) column 1, line 10 - column 3, line 5 -----	1,5,11, 13

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

9 July 2002

Date of mailing of the international search report

17/07/2002

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Brichau, G

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/08757

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0955774	A	10-11-1999	KR 261112 B1	01-07-2000
			EP 0955774 A2	10-11-1999
			JP 3202205 B2	27-08-2001
			JP 2000013445 A	14-01-2000
EP 1017206	A	05-07-2000	EP 1017206 A2	05-07-2000

Form PCT/ISA/210 (patent family annex) (July 1992)

**This Page Blank (uspto)**